


SBL




OUTLINE DRAWINGS

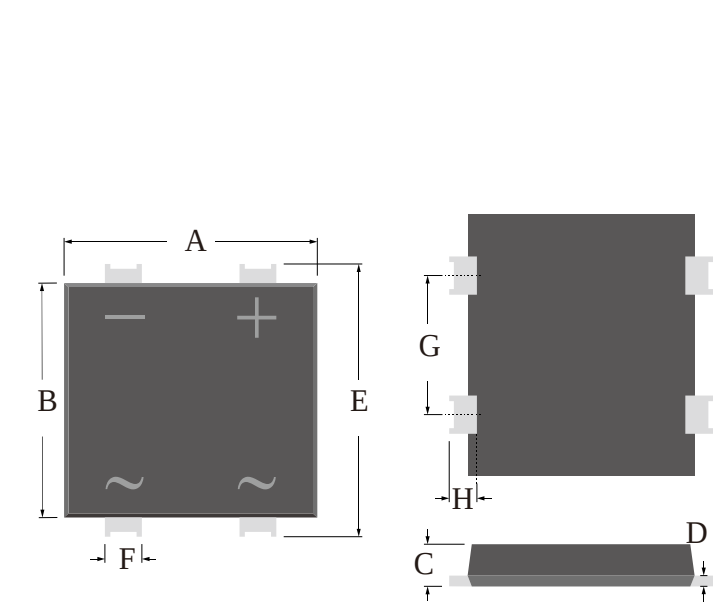

SBL

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.40	-	9.80	0.3701	-	0.3858
B	8.40	-	8.80	0.3307	-	0.3465
C	1.35	-	1.75	0.0531	-	0.0689
D	0.25	-	0.55	0.0098	-	0.0217
E	9.80	-	10.20	0.3858	-	0.4016
F	1.25	-	1.55	0.0492	-	0.0610
G	4.90	-	5.30	0.1929	-	0.2087
H	0.85	-	1.25	0.0335	-	0.0492

RECOMMEDND LAYOUT DRAWINGS

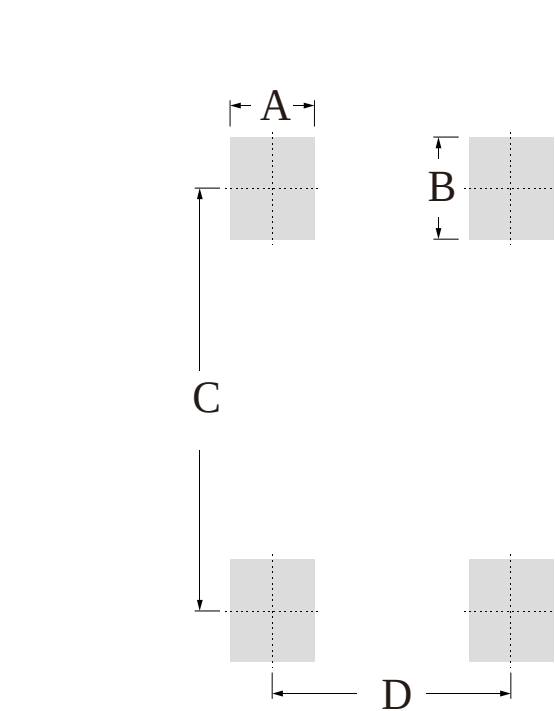


SBL

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	1.80	-	-	0.0709	-
B	-	2.10	-	-	0.0827	-
C	-	8.70	-	-	0.3425	-
D	-	5.10	-	-	0.2008	-

SBL



MARKING

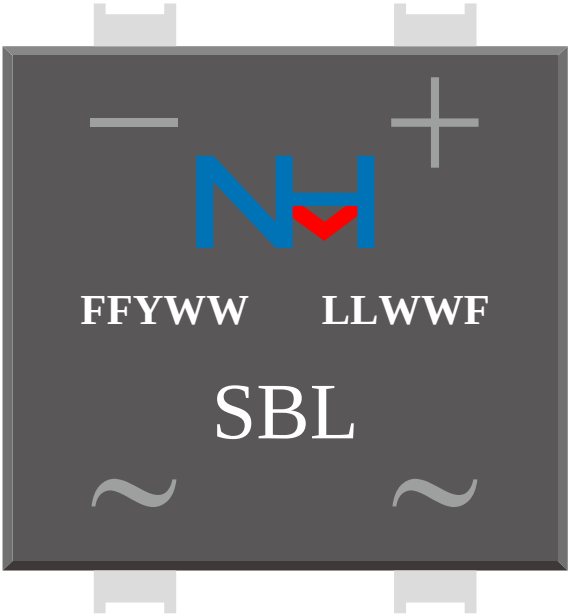

MARKING INSTRUCTION

NH=Niuhang Trademark
FF=Product Line Code,According To Actual Changes
YWW=Date Code,According To Actual Changes
LLWWF=Inernal Code,According To Actual Changes
SBL=Model
- ~ ~ +=Polarity Mark

PACKING INFORMATION

Package Type	Package Code	Product Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
SBL	P1	0.46	13" Reel	3000	6000	30000