




PTO-252


OUTLINE DRAWINGS

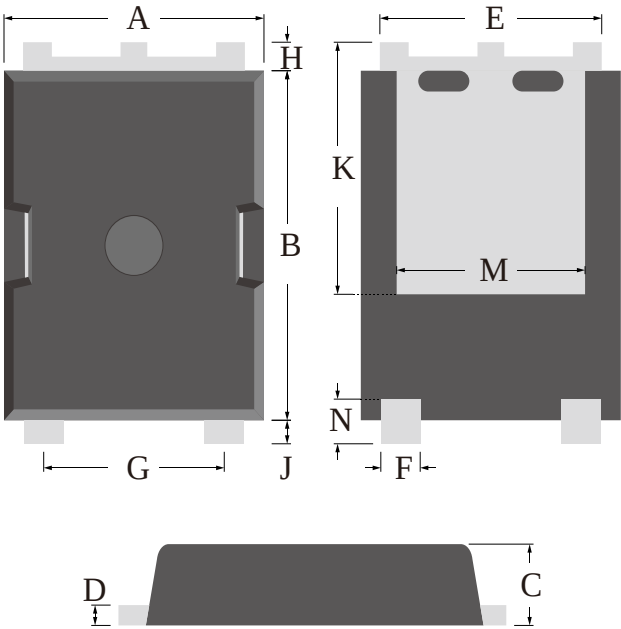

PTO-252

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.32	-	6.92	0.2488	-	0.2724
B	8.30	-	8.90	0.3268	-	0.3504
C	1.80	-	2.20	0.0709	-	0.0866
D	0.35	-	0.65	0.0138	-	0.0256
E	5.35	-	5.95	0.2106	-	0.2343
F	0.80	-	1.20	0.0315	-	0.0472
G	4.30	-	4.90	0.1693	-	0.1929
H	0.55	-	0.85	0.0217	-	0.0335
J	0.45	-	0.75	0.0177	-	0.0295
K	5.90	-	6.30	0.2323	-	0.2480
M	4.50	-	5.10	0.1772	-	0.2008
N	0.90	-	1.30	0.0354	-	0.0512

RECOMMEDND LAYOUT DRAWINGS

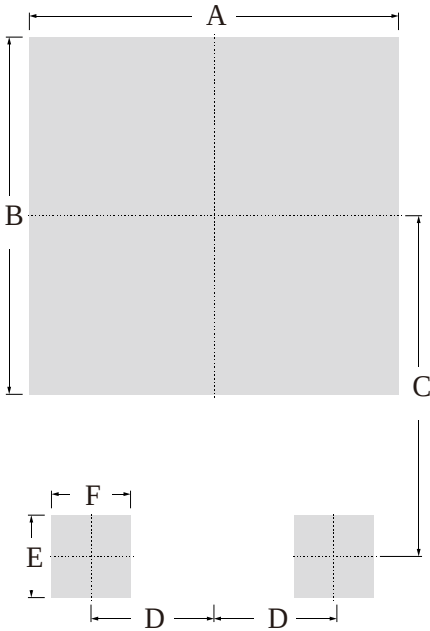

PTO-252

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	7.00	-	-	0.2756	-
B	-	6.50	-	-	0.2559	-
C	-	6.20	-	-	0.2441	-
D	-	4.60	-	-	0.1811	-
E	-	1.50	-	-	0.0591	-
F	-	1.50	-	-	0.0591	-

PTO-252



MARKING



MARKING INSTRUCTION

NH=Niuhan Trademark
FF=Product Line Code,According To Actual Changes
YWW=Date Code,According To Actual Changes
LLWWF=Inernal Code,According To Actual Changes
PTO-252=Model

PACKING INFORMATION

Package Type	Package Code	Product Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
PTO-252	P1	0.438	13" Reel	2500	5000	30000
PTO-252	P2	0.438	13" Reel	2500	2500	25000