




GBJ-H


OUTLINE DRAWINGS

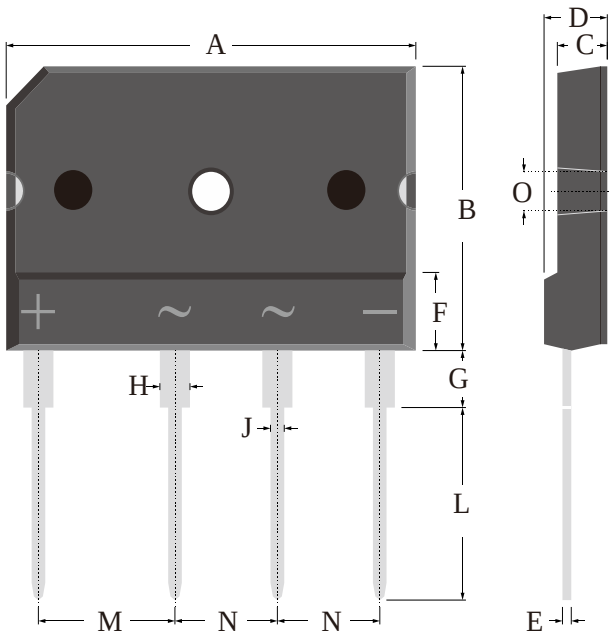

GBJ-H

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	29.00	-	31.00	1.1417	-	1.2205
B	19.00	-	21.00	0.7480	-	0.8268
C	3.45	-	3.95	0.1358	-	0.1555
D	4.35	-	4.85	0.1713	-	0.1909
E	0.50	-	0.90	0.0197	-	0.0354
F	5.20	-	5.80	0.2047	-	0.2283
G	3.75	-	4.25	0.1476	-	0.1673
H	2.00	-	2.40	0.0787	-	0.0945
J	0.80	-	1.20	0.0315	-	0.0472
L	13.00	-	15.00	0.5118	-	0.5906
M	9.50	-	10.50	0.3740	-	0.4134
N	7.20	-	7.80	0.2835	-	0.3071
O	3.00	-	3.40	0.1181	-	0.1339

RECOMMEDND LAYOUT DRAWINGS

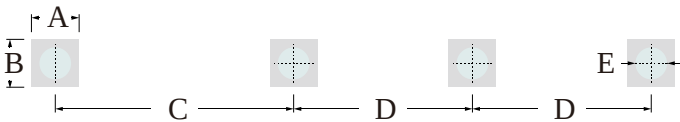


GBJ-H

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	2.00	-	-	0.0787	-
B	-	2.00	-	-	0.0787	-
C	-	10.00	-	-	0.3937	-
D	-	4.60	-	-	0.1811	-
E	-	1.20	-	-	0.0472	-


GBJ-H

MARKING

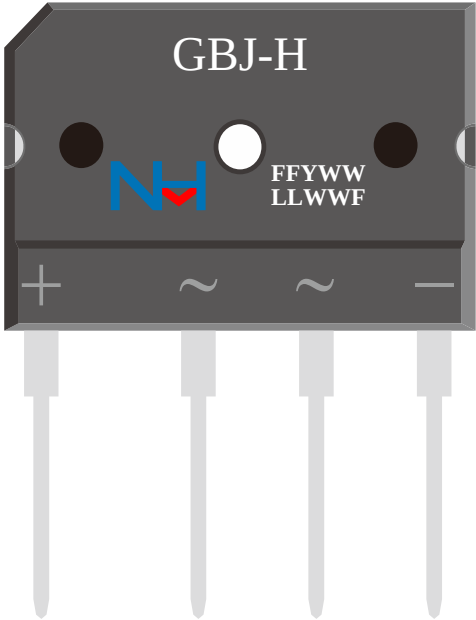

MARKING INSTRUCTION

NH=Niuhang Trademark
FF=Product Line Code,According To Actual Changes
YWW=Date Code,According To Actual Changes
LLWWF=Inernal Code,According To Actual Changes
GBJ-H=Model
+ ~ ~ -=Polarity Mark

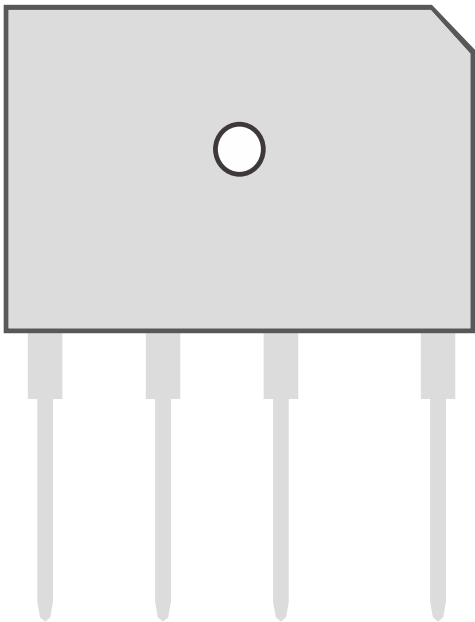

PACKING INFORMATION

Package Type	Package Code	Product Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
GBJ-H	P1	6.873	Box	250	250	5000
GBJ-H	P2	6.873	Tube	15	750	1500