




KBJ


OUTLINE DRAWINGS

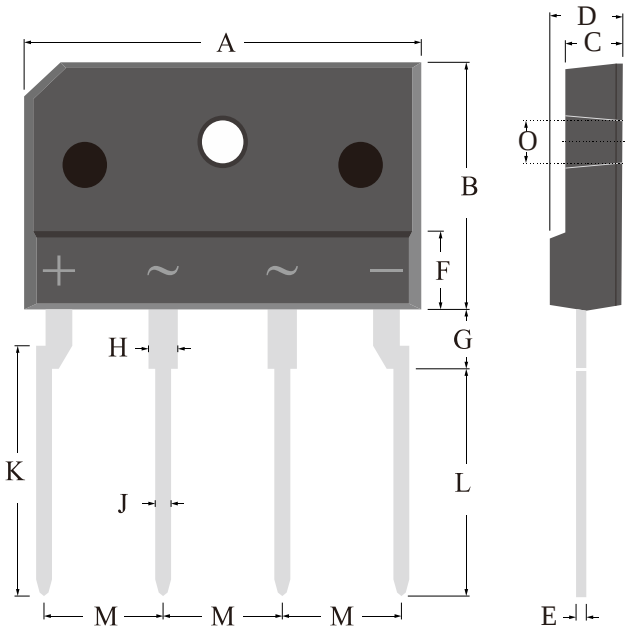

KBJ

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	24.00	-	26.00	0.9449	-	1.0236
B	14.00	-	16.00	0.5512	-	0.6299
C	3.30	-	3.90	0.1299	-	0.1535
D	4.20	-	4.80	0.1654	-	0.1890
E	0.40	-	0.80	0.0157	-	0.0315
F	4.50	-	5.00	0.1772	-	0.1969
G	3.40	-	3.80	0.1339	-	0.1496
H	1.60	-	2.00	0.0630	-	0.0787
J	0.85	-	1.15	0.0335	-	0.0453
K	14.00	-	16.00	0.5512	-	0.6299
L	12.70	-	114.70	0.5000	-	4.5157
M	7.25	-	7.75	0.2854	-	0.3051
O	3.00	-	3.40	0.1181	-	0.1339

RECOMMEDND LAYOUT DRAWINGS

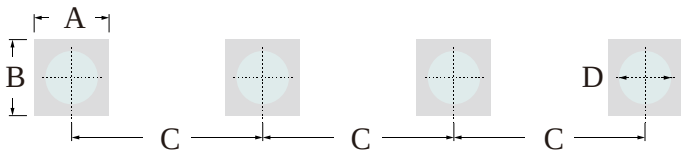


KBJ

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	2.00	-	-	0.0787	-
B	-	2.00	-	-	0.0787	-
C	-	7.50	-	-	0.2953	-
D	-	1.20	-	-	0.0472	-

KBJ

MARKING

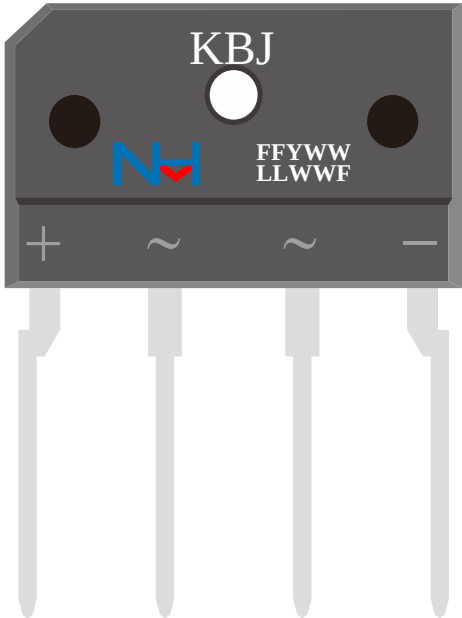

MARKING INSTRUCTION

NH=Niuhang Trademark
FF=Product Line Code,According To Actual Changes
YWW=Date Code,According To Actual Changes
LLWWF=Inernal Code,According To Actual Changes
KBJ=Model
+ ~ ~ -=Polarity Mark

PACKING INFORMATION

Package Type	Package Code	Product Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
KBJ	P1	4.085	Box	250	250	2500
KBJ	P2	4.085	Tube	20	1000	2000