


KBJL




OUTLINE DRAWINGS

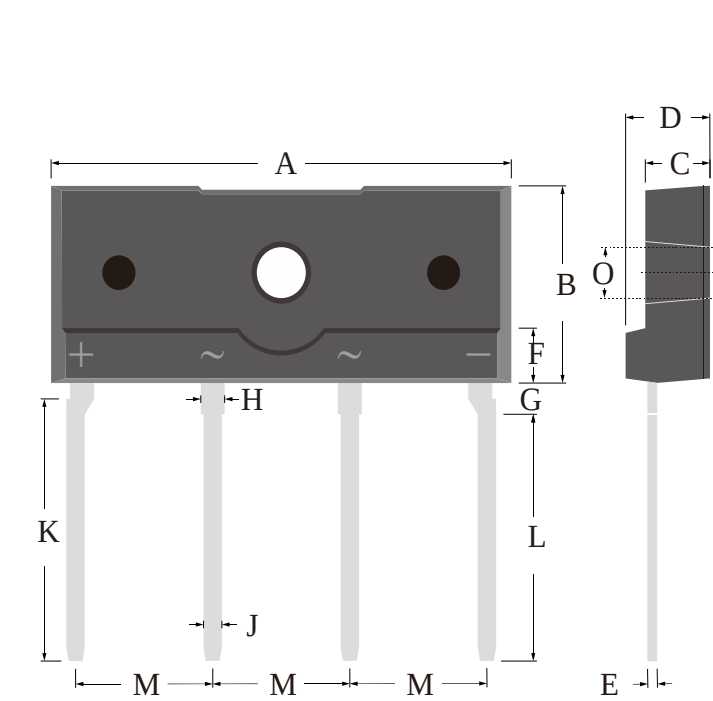

KBJL

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	24.00	-	26.00	0.9449	-	1.0236
B	9.80	-	10.80	0.3858	-	0.4252
C	3.25	-	3.75	0.1280	-	0.1476
D	4.35	-	4.85	0.1713	-	0.1909
E	0.33	-	0.73	0.0130	-	0.0287
F	2.65	-	3.05	0.1043	-	0.1201
G	1.45	-	1.85	0.0571	-	0.0728
H	1.10	-	1.50	0.0433	-	0.0591
J	0.80	-	1.20	0.0315	-	0.0472
K	13.20	-	14.20	0.5197	-	0.5591
L	12.40	-	13.40	0.4882	-	0.5276
M	7.15	-	7.75	0.2815	-	0.3051
O	3.00	-	3.50	0.1181	-	0.1378

RECOMMEDND LAYOUT DRAWINGS

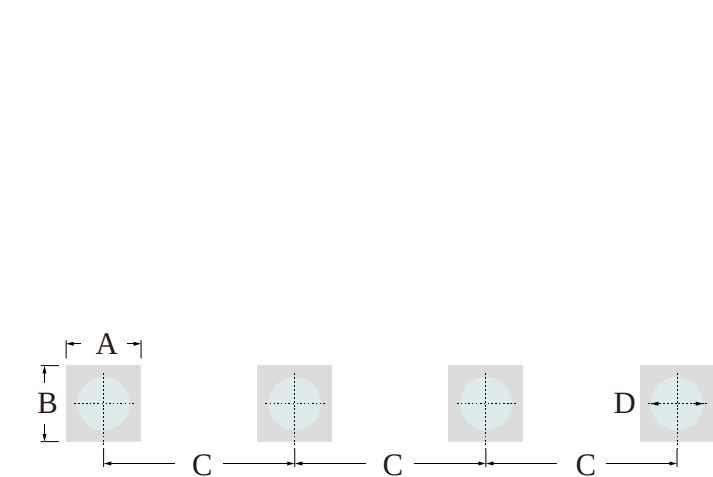


KBJL

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	2.00	-	-	0.0787	-
B	-	2.00	-	-	0.0787	-
C	-	7.50	-	-	0.2953	-
D	-	1.30	-	-	0.0512	-

KBJL

MARKING

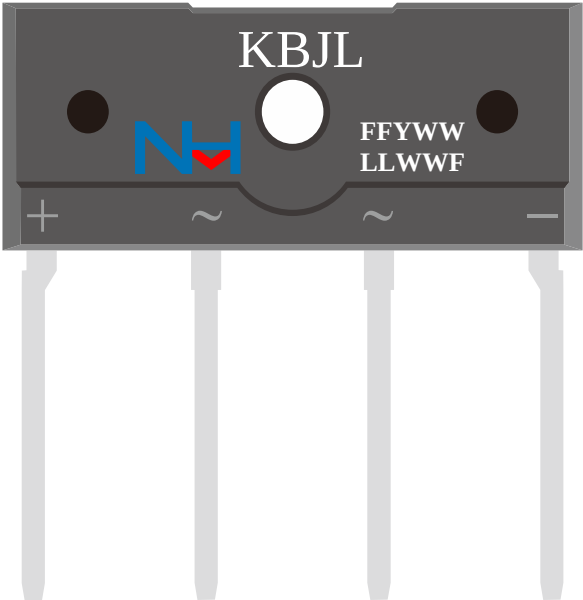

MARKING INSTRUCTION

NH=Niuhang Trademark
FF=Product Line Code,According To Actual Changes
YWW=Date Code,According To Actual Changes
LLWWF=Inernal Code,According To Actual Changes
KBJL=Model
+ ~ ~ -=Polarity Mark

PACKING INFORMATION

Package Type	Package Code	Productor Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
KBJL	P1	2.568	Box	250	250	2500
KBJL	P2	2.568	Tube	20	1000	2000