




TO-220AC


OUTLINE DRAWINGS

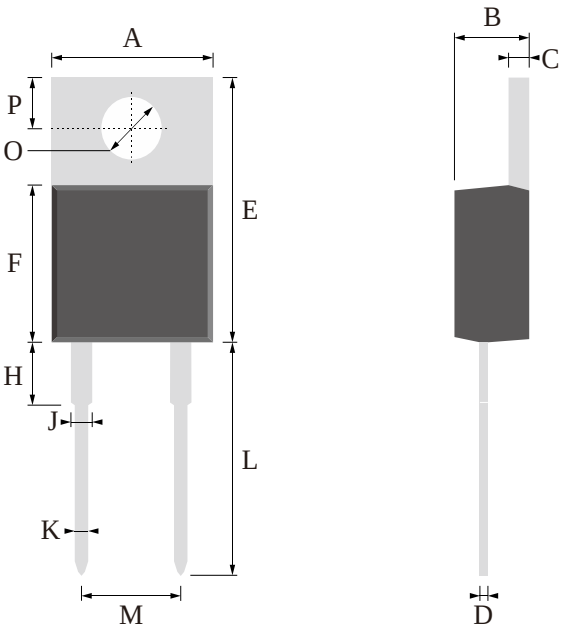

TO-220AC

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.25	-	10.75	0.3642	-	0.4232
B	4.15	-	4.75	0.1634	-	0.1870
C	1.10	-	1.50	0.0433	-	0.0591
D	0.30	-	0.50	0.0118	-	0.0197
E	14.20	-	16.20	0.5591	-	0.6378
F	8.00	-	9.50	0.3150	-	0.3740
L	12.10	-	14.10	0.4764	-	0.5551
H	2.20	-	2.80	0.0866	-	0.1102
J	1.15	-	1.55	0.0453	-	0.0610
K	0.70	-	1.00	0.0276	-	0.0394
M	4.70	-	5.20	0.1850	-	0.2047
O	3.45	-	4.15	0.1358	-	0.1634
P	2.40	-	3.40	0.0945	-	0.1339

RECOMMEDND LAYOUT DRAWINGS

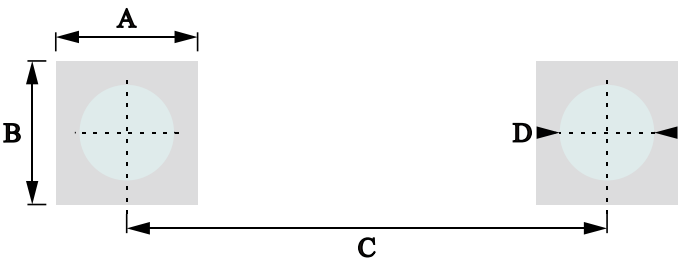

TO-220AC

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	1.60	-	-	0.0630	-
B	-	1.60	-	-	0.0630	-
C	-	5.08	-	-	0.2000	-
D	-	1.00	-	-	0.0394	-

TO-220AC

MARKING



MARKING INSTRUCTION

NH=Niuhang Trademark
FF=Product Line Code,According To Actual Changes
YWW=Date Code,According To Actual Changes
LLWWF=Inernal Code,According To Actual Changes
TO-220AC=Model

PACKING INFORMATION

Package Type	Package Code	Product Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
TO-220AC	P1	1.834	Tube	50	1000	5000