


TO-251S


OUTLINE DRAWINGS

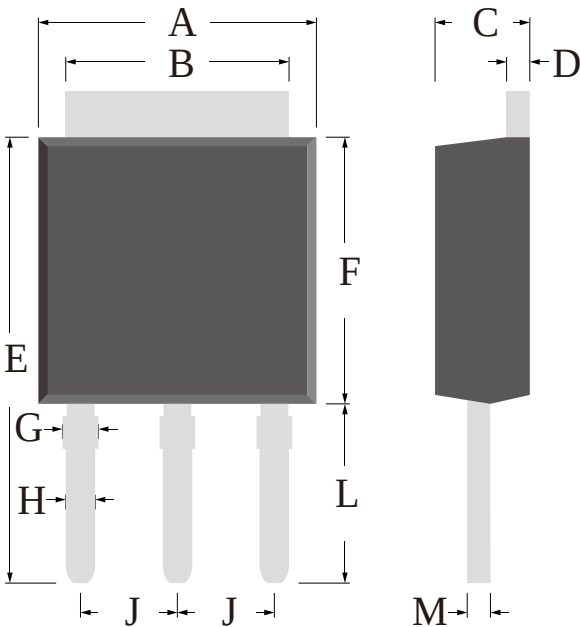

TO-251S

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.10	-	7.10	0.2402	-	0.2795
B	4.80	-	5.80	0.1890	-	0.2283
C	1.95	-	2.55	0.0768	-	0.1004
D	0.35	-	0.75	0.0138	-	0.0295
E	10.50	-	12.00	0.4134	-	0.4724
F	5.60	-	6.60	0.2205	-	0.2598
G	0.70	-	1.00	0.0276	-	0.0394
H	0.50	-	0.90	0.0197	-	0.0354
J	2.10	-	2.50	0.0827	-	0.0984
L	3.80	-	4.40	0.1496	-	0.1732
M	0.35	-	0.75	0.0138	-	0.0295

RECOMMEDND LAYOUT DRAWINGS

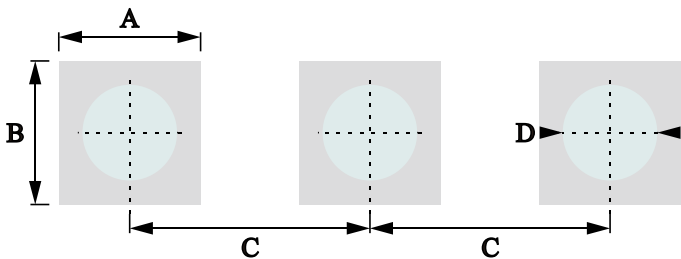

TO-251S

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	1.60	-	-	0.0630	-
B	-	1.60	-	-	0.0630	-
C	-	2.30	-	-	0.0906	-
D	-	0.90	-	-	0.0354	-

TO-251S

MARKING



MARKING INSTRUCTION

NH=Niuhang Trademark
FF=Product Line Code,According To Actual Changes
YWW=Date Code,According To Actual Changes
LLWWF=Inernal Code,According To Actual Changes
TO-251S=Model

PACKING INFORMATION

Package Type	Package Code	Product Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
TO-251S	P1	0.324	Tube	50	4000	20000