


TO-262


OUTLINE DRAWINGS

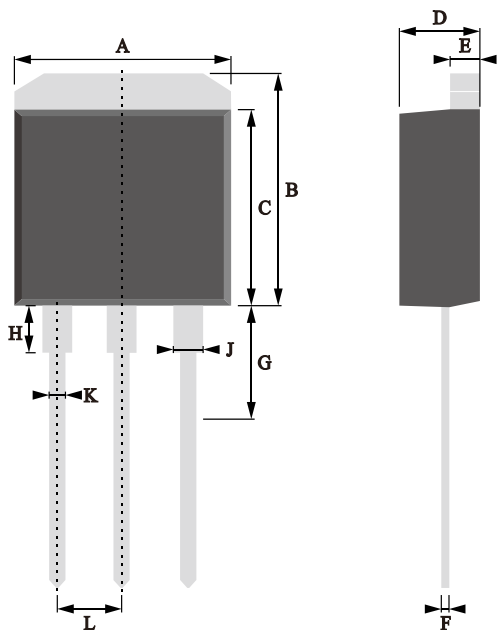

TO-262

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.30	-	10.50	0.3661	-	0.4134
B	9.60	-	11.60	0.3780	-	0.4567
C	8.20	-	9.50	0.3228	-	0.3740
D	4.00	-	5.00	0.1575	-	0.1969
E	1.00	-	1.70	0.0394	-	0.0669
F	0.20	-	0.70	0.0079	-	0.0276
G	11.90	-	14.40	0.4685	-	0.5669
H	1.25	-	1.85	0.0492	-	0.0728
J	1.00	-	1.60	0.0394	-	0.0630
K	0.60	-	1.00	0.0236	-	0.0394
L	2.25	-	2.80	0.0886	-	0.1102

RECOMMEDND LAYOUT DRAWINGS

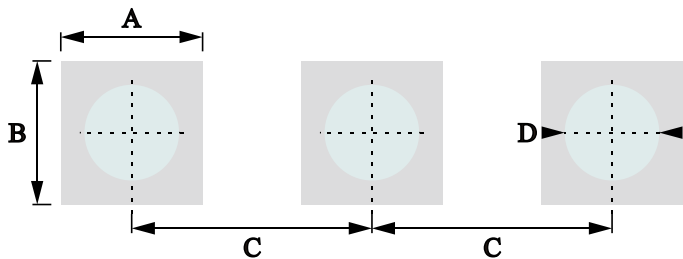


TO-262

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	1.60	-	-	0.0630	-
B	-	1.60	-	-	0.0630	-
C	-	2.54	-	-	0.1000	-
D	-	1.00	-	-	0.0394	-

TO-262

MARKING

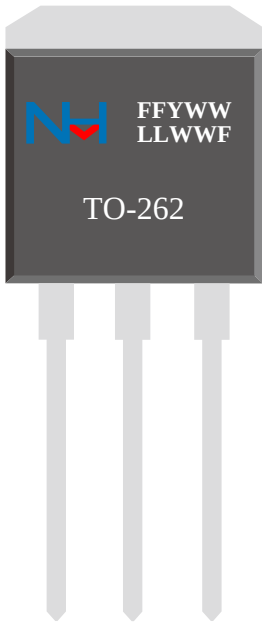

MARKING INSTRUCTION

NH=Niuhang Trademark
FF=Product Line Code,According To Actual Changes
YWW=Date Code,According To Actual Changes
LLWWF=Inernal Code,According To Actual Changes
TO-262=Model

PACKING INFORMATION

Package Type	Package Code	Product Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
TO-262	P1	2.14	Tube	50	1000	5000